

Platinum® 90 Suite

**The equilibrium
of strength
and design**

Platinum® 90

The equilibrium of strength and design.

The Platinum 90 suite incorporates 64mm studs with 13mm plasterboard. This popular suite offers three glazing options; centre glazed, offset glazed and double glazed. Whilst centre glazed is most commonly used, the offset glazed option creates an expansive sensation, and provides practical benefits such as the ability to incorporate blinds within the frame to increase privacy. All three glazing options are

interchangeable.


Double glazing provides additional acoustic benefits, and has proved to be a very popular option in locations where sound reduction is important. Executive office suites and windows into the warehouse are two zones where sound reduction is a priority.

Features of the Platinum 90

- Offers acoustic performance
- Estimated sound rating for solid plasterboard walls:
 - RW 35 (without insulation)
 - RW 40 (with CAB3 Polyester Insulation)
- Provides two plasterboard options:
 - 1) 64mm studs with a single skin of 13mm plasterboard on either side of the stud, or
 - 2) 51mm studs with a double skin of 13mm plasterboard on one side of the stud and a single



skin on the other

- Glazing pocket incorporates 6mm to 10mm glass
- Door Stop options allow for 35mm, 38mm or 44mm doors
- Glazing pocket accepts either a captive wedge or silicone glazing options
- Window/Door frames and Ceiling Channel accommodates gussets providing enhanced joining capabilities

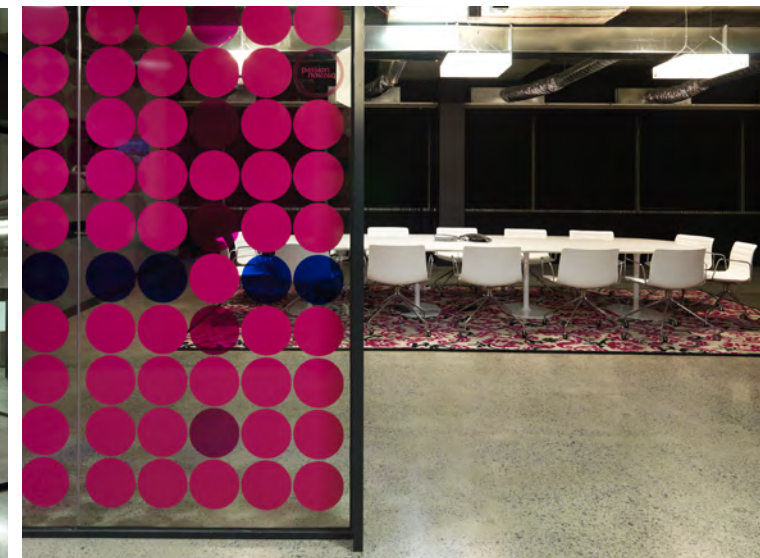

Platinum® 90

To suit 64mm Studs

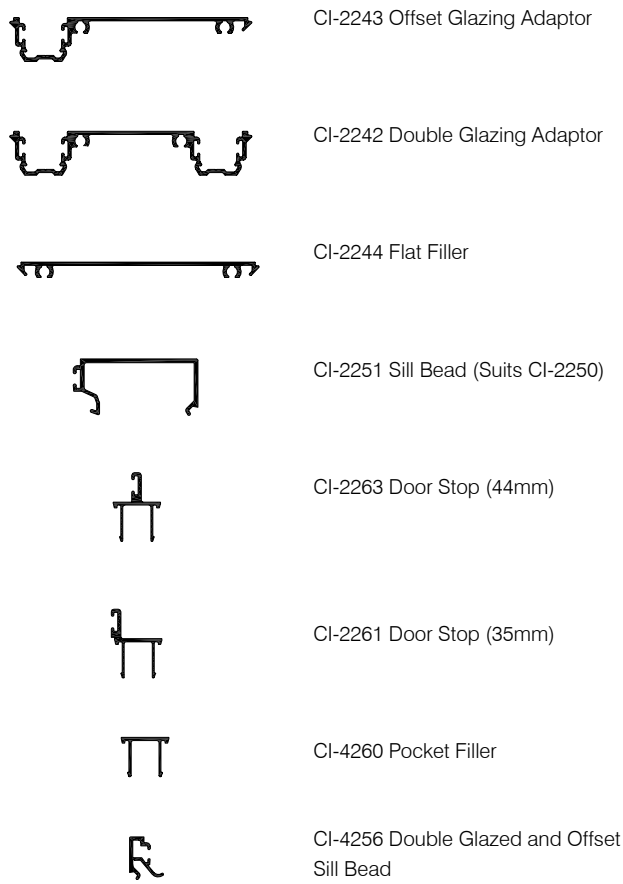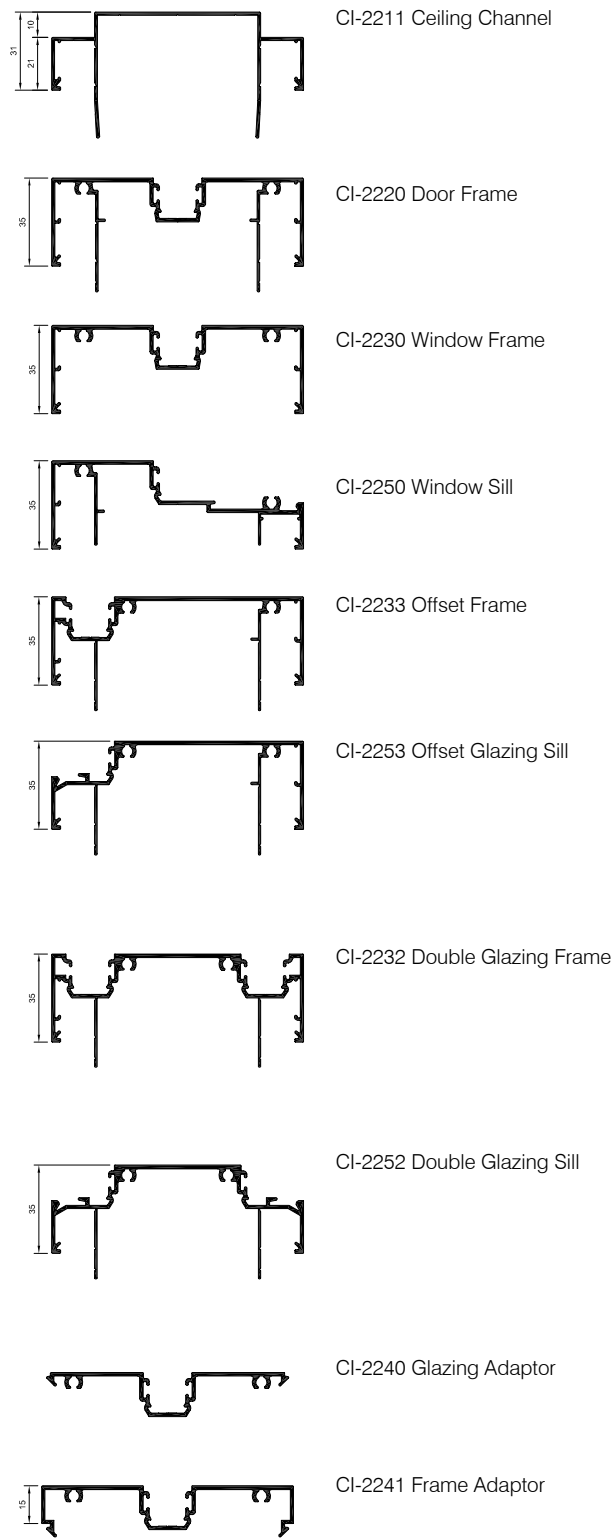


Platinum® 90


Platinum Joining Stake Provision




Channel Bracket - Fixing solution when using 25 x 25 glazing channel on horizontals

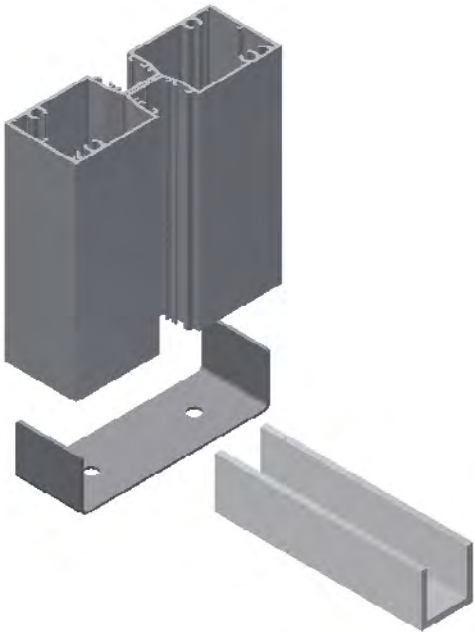

Offset Glazing Elevation

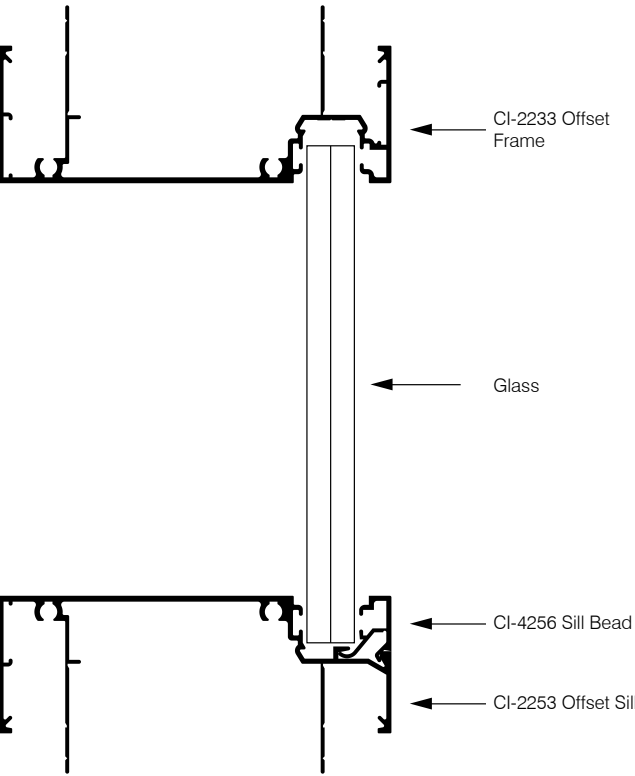


Double Glazing Elevation

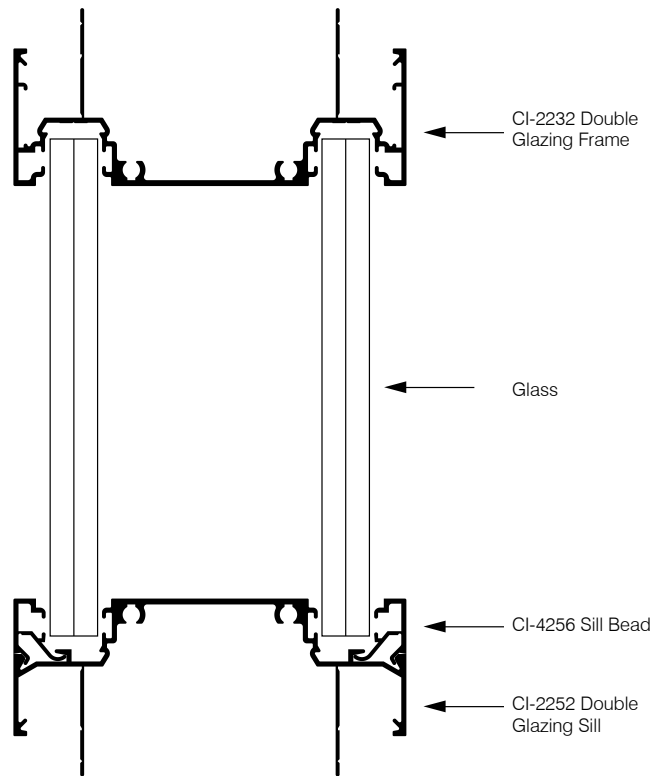


Platinum® 90


Plan View

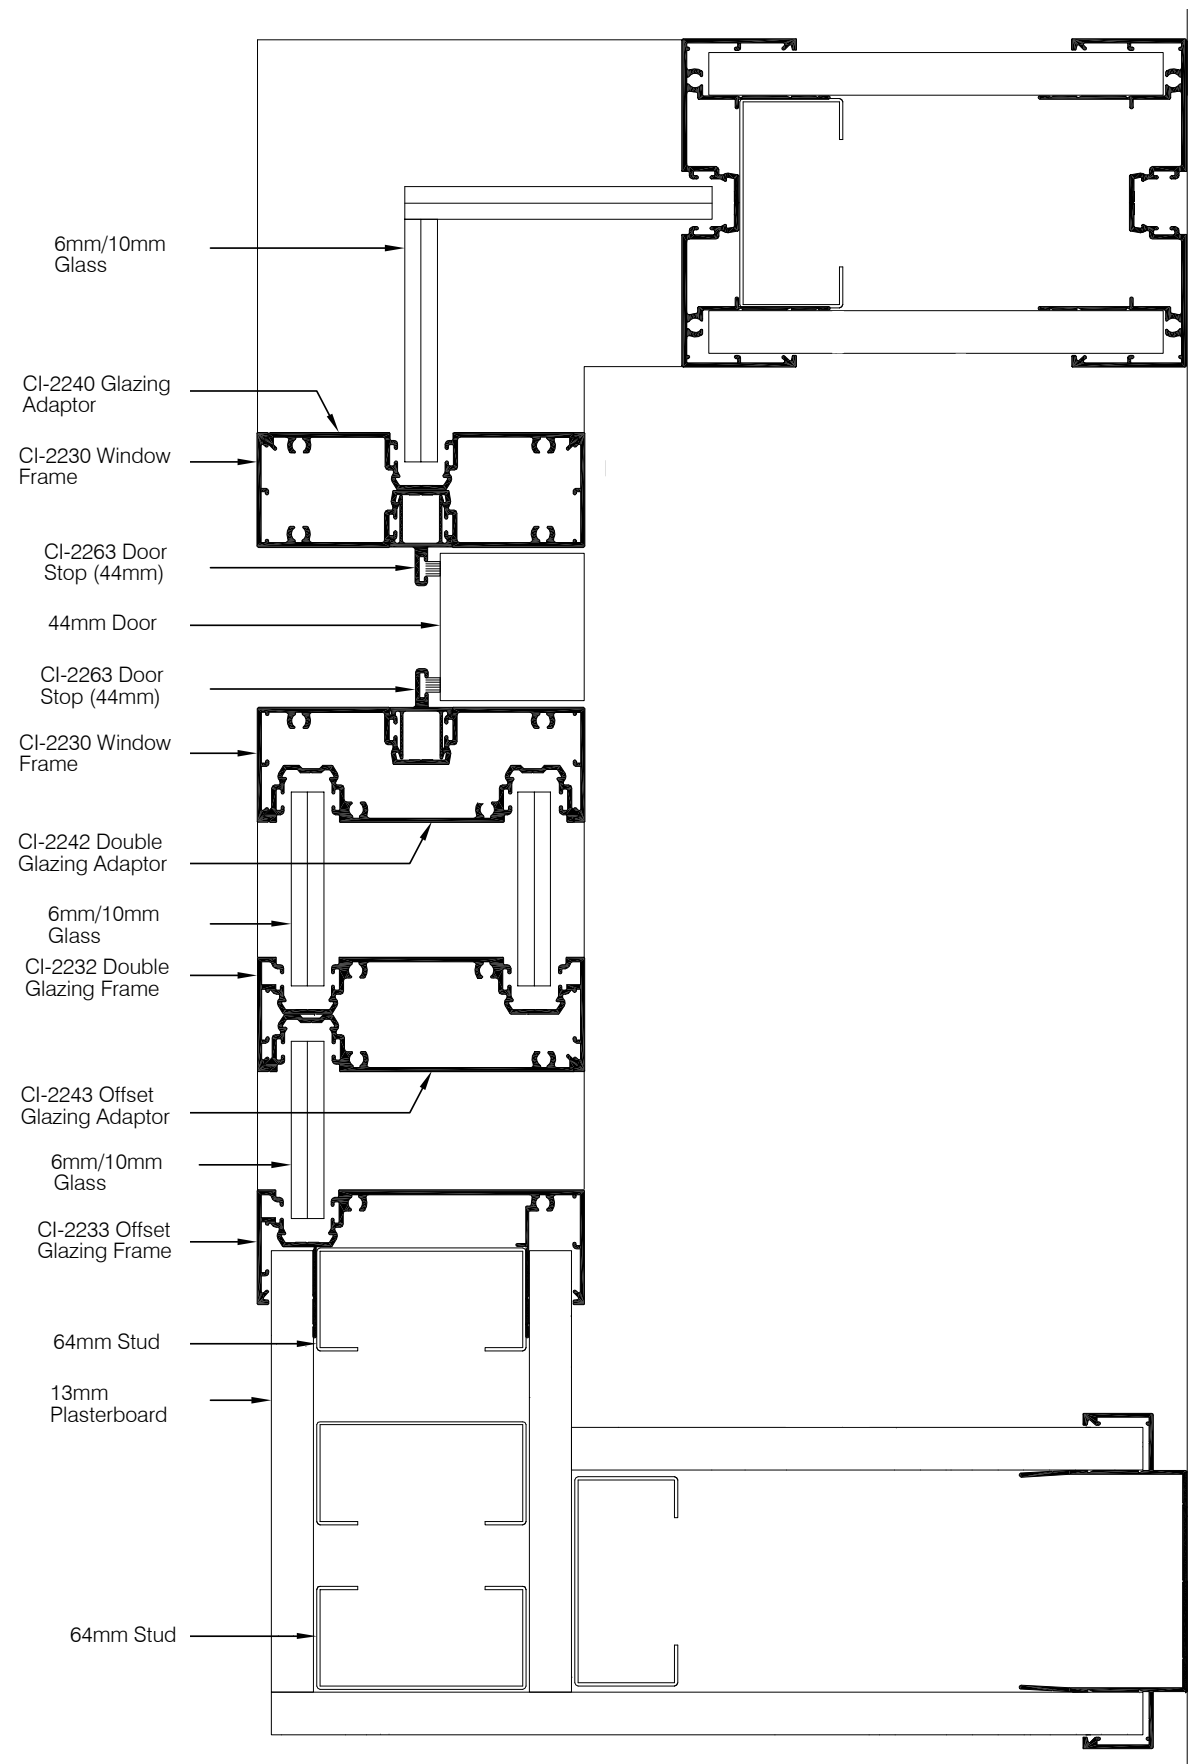


Platinum® 90

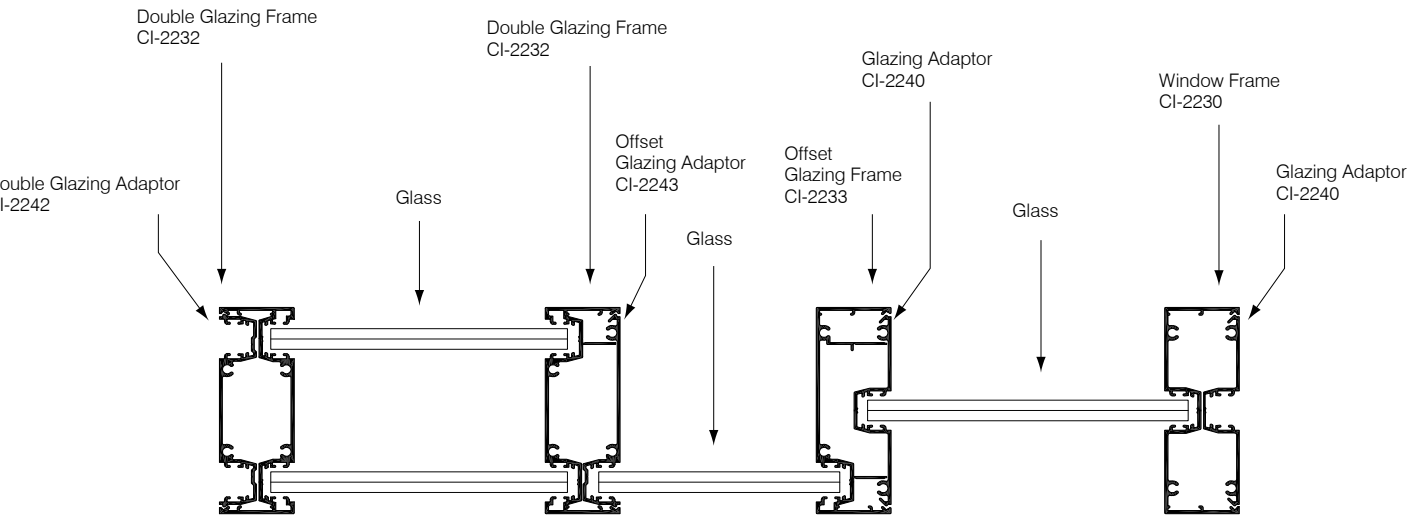

Full Height Offset Glazing

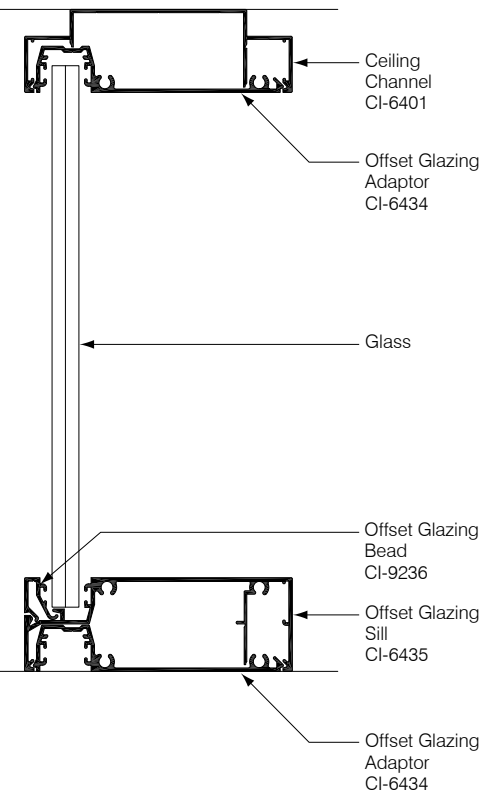

Half Height Double Glazing

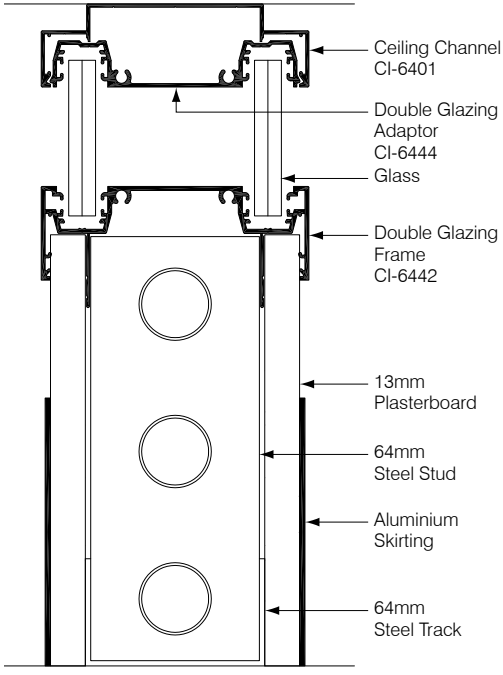

Criterion Industries (VIC)

Northcorp Industry Park
15 Corporate Place

Broadmeadows VIC 3047

Telephone 03 9355 0700

Facsimile 03 9355 0777

sales@criterionindustries.com.au

www.criterionindustries.com.au

Criterion Industries (NSW)

95 Victoria Street
Smithfield NSW 2164

Po Box 2135 Smithfield NSW 2164

Telephone 02 9355 0700

Facsimile 02 9355 0777

sales.nsw@criterionindustries.com.au

www.criterionindustries.com.au

Criterion Industries (WA)

9 Bellows Street
Welshpool WA 6106

Po Box 394 Bentley WA 6982

Telephone 08 9355 0700

Facsimile 08 9355 0702

sales.wa@criterionindustries.com.au

www.criterionindustries.com.au